

# **TRENCH'N edge**<sup>TM</sup> Rotary Trencher

*The ONLY Trencher*



*that cleans up after itself*

***Eliminate the high cost of clean-up by blowing material directly onto tarps.***



Dual-side discharge into or out of bed so material won't ruin existing lawns or planting beds.



No clean-up costs means increased profits and happy customers.

For Smooth Curves and Less Work, Call 800-4-T-EDGER, (800-483-3437).

For the Edge, Inc., 8028 Hill Trail North, Lake Elmo, MN 55042-9534

Phone (651) 777-7923,

Fax (651) 770-9430

[www.trenchnedge.com](http://www.trenchnedge.com)

**US Patent Number US05964049**

# Dual Side Discharge

Trench for: waterlines

- sprinkler systems
- drain tile
- lighting cable
- landscape walls
- footings for garages
- pruning roots and edging (plastic, brick, rock, concrete, etc.)



Dual side discharge, sends soil into or out of flower bed, from either direction



# Low Maintenance Costs With:



## Replaceable Cutting Teeth

*Safety First*  
Cutting Blades and Belt enclosed in steel housings




## Adjustable Depth

Easily Adjustable  
Depth from 0" to 9"  
Depth - Crank it down to the desired Depth-  
Each Turn 1/2"

## Retractable Blade



Avoid the "dark side" of portable trenching with our new floating cutting head The Rock-E-Vader™ is a spring-loaded cutting head with carbide-tipped frost points. The cutting head can retract and lift over most large obstructions (rocks, roots, etc.). This feature reduces repair and maintenance costs that fixed head trenchers can't match.

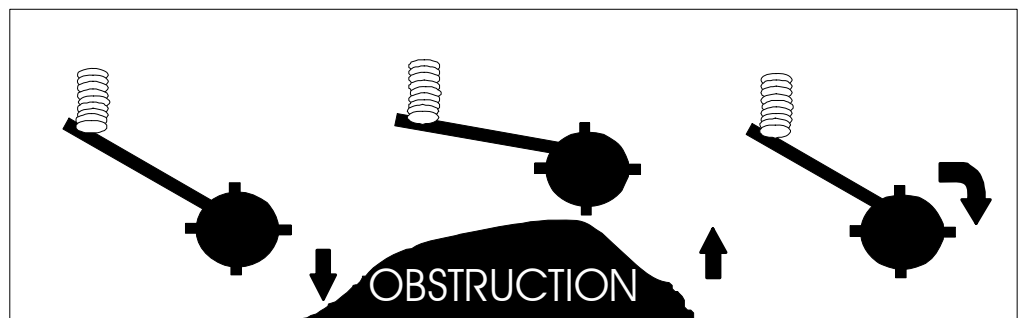

## Steerable front wheel



Allows for tight turns and curves and the ability to cut small diameter tree rings down to 18" diameter.



## Wide Trenches Up to 4'

Brick Edging, retaining walls, natural stone, brick edging pathways



## Bed edging and Brick edging



The **TRENCH'N edge Rotary Trencher** cuts a clean uniform flat bottom trench that fits SELECTedge™ Landscape Border Stones and other concrete and brick edging reducing installation time and labor.



# The TRENCH'N edge is the only portable trencher to have all of these unique features:

- Blows the trenched material onto tarps - to reduce clean-up labor.
- Steerable front pivot wheel.
- Cuts small-diameter tree rings-- as tight as 18" diameter.
- No need to buy multiple blades for each depth and width.
- Can cut a double-wide trench -- up to 10" wide or flip the wheels to the outside to cut up to 18" wide.
- Material can discharge on either side of machine for increased flexibility and reduced cleanup.
- 9 HP Honda engine to cut through tough clays and rocky soils.
- Cutting wheel centered between the rear wheels for a uniform trench during tight radiuses.
- Narrow machine design to allow closer cuts to existing flower beds and foundations.
- Trencher teeth are replaceable carbide tip frost points.
- Spring loaded retractable cutting blade to reduce maintenance costs.
- Square bed edging to remove more soil from the bed to allow for extra rock and mulch.
- All blades and belts enclosed in steel housing for operator safety.
- Portable compact design for easy loading in minivans and pickups.
- Trench waterlines, sprinkler systems, lighting cable, drain tile, landscape walls, and edging ( plastic, brick, rock, and modular concrete, etc.).

## Specifications

Dear TRENCH'N edge Trencher,

"The TRENCH 'N edge Trencher is a god send. Do to my oldest daughter's graduation open house, we had to cut and install 450 feet of Selectedge (modular brick edging) in-one day. The trencher cut a clean trench and blew the dirt directly onto tarps so we didn't ruin our lawn or mulched flower beds. What we thought would be a 2 weekend installation took only one day. Thank you for your truly amazing machine!"

Scott & Betsy Kaercher  
Homeowner

Engine:	9 HP Honda
Landscape trencher cut:	Up to 5" wide x 6" deep
Irrigation trencher cut:	Up to 2.5" wide x 9" deep
Speed:	Up to 25 feet per minute, varies with ground conditions
Discharge:	Dual side: displaced soil can be discharged into or out of a bed, on either side of machine
Drive:	Double V-belt with Idler Clutch from engine to rotor and optional 3" centrifical clutch available
Trencher Teeth:	Up to 8 replaceable Carbide Bits mounted in forged steel holdders
Service Parts:	Standard components may be obtained locally
Dimensions:	60" long x 25" wide x 30" high
Weight:	225#
Shipping:	58" x 25" x 30", 25.3 cubic feet, 275#
Assembly:	Fully Assembled from Factory

---

For Smooth Curves and Less Work, Call 800-4-T-EDGER, (800-483-3437).  
For the Edge, Inc., 8028 Hill Trail North, Lake Elmo, MN 55042-9534  
Phone (651) 777-7923, Fax (651) 770-9430 [www.trenchnedge.com](http://www.trenchnedge.com)  
**US Patent Number US05964049**